

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/088128 A1

(51) International Patent Classification⁷: F04B 43/06,
43/067, 45/053

Donald [NZ/NZ]; 339 Old West Road, R D 4, Palmerston North (NZ).

(21) International Application Number:
PCT/NZ2005/000046

(74) Agent: HOPKINS, Donald, Leslie; c/- Don Hopkins & Associates, Unit 2, Northcote Office Park, 145-147 Queen Street, Palmerston North (NZ).

(22) International Filing Date: 18 March 2005 (18.03.2005)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
531822 18 March 2004 (18.03.2004) NZ

(71) Applicant (for all designated States except US): PRECISION DISPENSING SYSTEMS LIMITED [NZ/NZ]; Aviation Way, Via Poultry Farm Road, Massey University, Palmerston North (NZ).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(72) Inventor; and

(75) Inventor/Applicant (for US only): GRAPES, Robert,

[Continued on next page]

(54) Title: A MEMBRANE PUMP

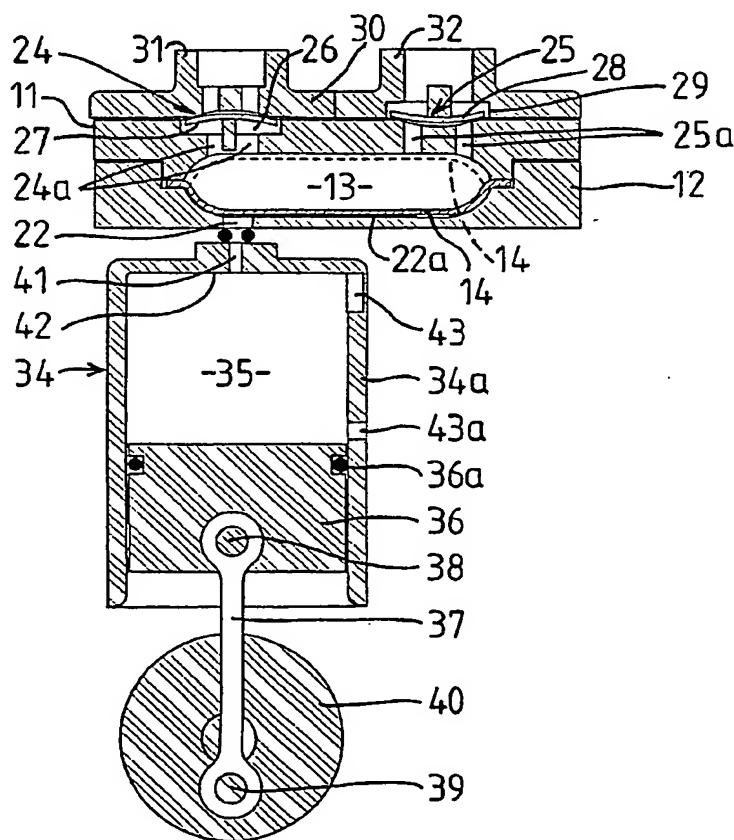

(57) Abstract: A pump that has a cavity (13) in which is located a flexible membrane (14). An inlet (24) opens into the cavity (13) and is associated with a valve (27). A valve (28) is likewise provided in an outlet (25). Also opening into cavity (13) is a port (22) to which means for applying negative and positive pressures can be connected whereby the flexible membrane (14) can be moved to its two states corresponding to completion of inlet and exhaust of a pumping cycle.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.